

Wheel Sensor RSR110



US

RSR110

Frauscher Wheel Sensor

High availability and versatility

The new high availability RSR110 wheel sensor can be easily integrated into the electronics of any system thanks to its open analog interface. It enables system integrators to adapt the interpretation of the signal perfectly in line with individual requirements.

Diverse applications

The RSR110 offers the user a high availability solution for switching and trigger tasks, such as:

- » Vision monitoring
- » Hot box and flat wheel detectors
- » Track-side lubrication
- » Weighbridges, AEI card readers
- » Detection of axle spacing and wheel arrangement
- » Gate control
- » Lighting systems
- » Washing systems
- » Automated measurement tasks (e.g. speed measurement).



Flat wheel detectors



Hot box detectors




Vision monitoring

High availability

The combination of different inductive operating principles and the robust design of the RSR110 guarantee high availability, even when subjected to extreme mechanical, electromagnetic, climatic or environmental interference.

Easy and fast mounting

The patented Frauscher rail claws are characterized by the utmost flexibility and accuracy and are available for all rail profiles currently in use. The plug-in connector cable as well as the automatic adjustment procedure significantly reduces the effort required for assembly, disassembly or changing the sensor, which in turn gives rise to savings both in terms of money and time. It also minimizes the amount of time spent by service personnel in a hazardous area.

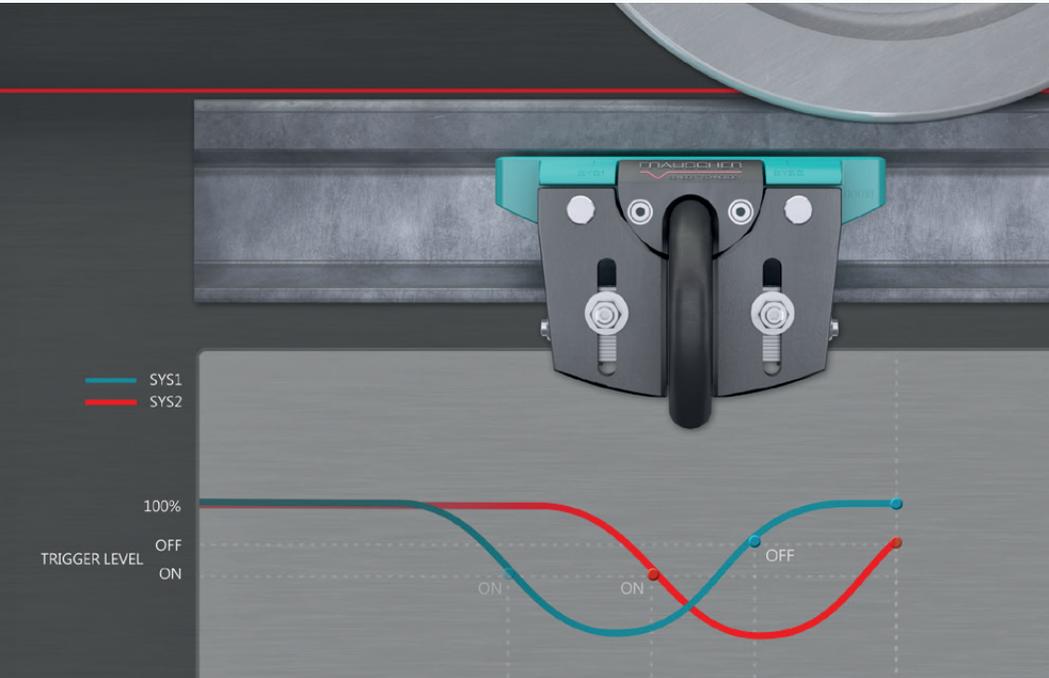

ADVANTAGES:

- » Open analog interface
- » Easy to integrate
- » Flexible evaluation
- » Fewer hardware components
- » Lower power consumption
- » Automatic adjustment procedure

Open interface for easy integration

The open analog interface of the RSR110 enables it to be integrated into the system electronics easily and directly. Evaluation can take place via a PLC or a microcontroller, for example. Since a separate evaluation board is not required, the number of hardware components also means that less space is required and less power is consumed.

Accurate and flexible evaluation

The RSR110 provides information in the form of load-independent current values. This enables the detection of an axle, direction, speed, axle count, wheel center and wheel diameter to be interpreted from the analog signal curve.

The damping-dependent current signal can be evaluated entirely freely according to the user's own requirements. The threshold values for triggering and the sample rate can also be freely selected depending on the specific application. Frauscher will also provide its customers with basic specifications and documents.

Technical data – RSR110

Housing dimensions	
Height	2 ³ / ₈ " (60 mm)
Width	10 ⁵ / ₈ " (270 mm)
Depth	3 ¹ / ₃₂ " (77 mm)
Drill hole spacing	5 ²³ / ₃₂ " (145 mm)
Drill hole diameter	¹⁵ / ₃₂ " (12 mm)
Input voltage	8 V DC to 33 V DC
Output signal	
Wheel sensor current	Constant current (no damping)
Current when occupied	Change in current (damping by train wheel)
Safety level	CENELEC requirements in accordance with EN 50126, EN 50128, EN 50129, SIL 0
Connection cable	Plug-in cable (standard lengths 16'5", 32'10" and 82' (5, 10 and 25 m))
Adjustment	Automated adjustment via the connection cable is possible from outside of the hazardous area No electronics in the trackside connection box
Mounting	Simple, universal mounting using the adjustable rail claw for all rail profiles currently in use (100 RE, 115 RE, 132 RE, 136 RE...)
Protection class	IP65 / IP68 - 8 kPa/60 min.
Climatic stress	
Temperature	-40°F to +185°F (-40°C to +85°C)
Humidity	up to 100%
UV resistance	Yes
Traversing speed	0 mph (static) to 280 mph (0 km/h (static) to 450 km/h) Fail-safe evaluation during partial traversing is also possible
Special features	Suitable for use with linear eddy current brake (ECB) Minimal sensitivity above the top of rail (TOR) High resistance to magnetic field interference and rail currents Plug-in connection on the wheel sensor Easy, universal mounting with the adjustable rail claw
Applications (including but not limited to)	Switching and trigger tasks, vision monitoring, hot box and flat wheel detectors, track-side lubrication, weighbridges, AEI card readers, identification of axle spacing and wheel arrangement, gate control, lighting systems, washing systems, automated measurement tasks such as speed measurement, wheel diameter calculation